




PCT/GB 2004 / 0 0 1 2 0 9



INVESTOR IN PEOPLE

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

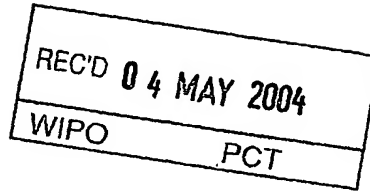


The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

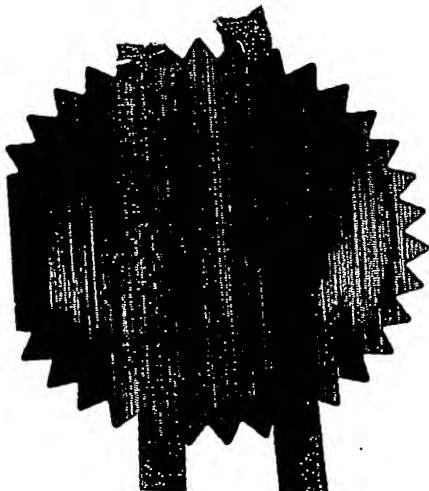

Signed

Dated


7 April 2004

BEST AVAILABLE COPY

## Patents Form 1/77

Patents Act 1977  
(Rule 16)20MAR03 E793874-1 010063  
P01/7700 0.00-0306409.4**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

2. Patent application number  
(The Patent Office will fill in this part)

0306409.4

3. Full name, address and postcode of the or of each applicant (underline all surnames)Cambridge Display Technology Limited  
Greenwich House  
Madingley Rise  
Madingley Road  
Cambridge CB3 0TX

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

6166441006

4. Title of the invention

ELECTROLUMINESCENT DEVICE

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

IP Department  
Cambridge Display Technology Limited  
Greenwich House  
Madingley Rise  
Madingley Road  
Cambridge  
CB3 0TX

Patents ADP number (if you know it)

6166441007

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)
---------	--	-------------------------------------

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

0064018 20 Mar 03 03:37

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	14
Claim(s)	5
Abstract	-
Drawing(s)	4

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	-
Request for preliminary examination and search (Patents Form 9/77)	1
Request for substantive examination (Patents Form 10/77)	1
Any other documents (please specify)	

11.

I/We request the grant of a patent on the basis of this application.

Signature

*A. Gilani*

Date

20th March 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Anwar Gilani  
Tel: 01223 723519

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

0064018 20-Mar-03 03:37

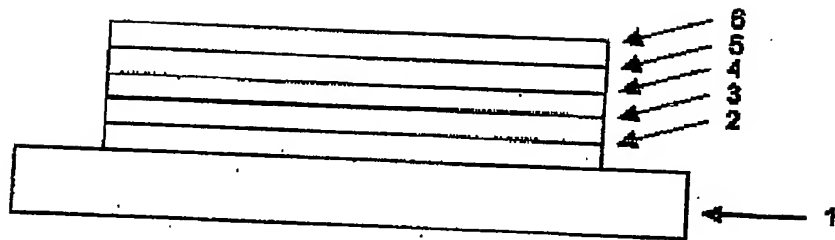


Figure 2

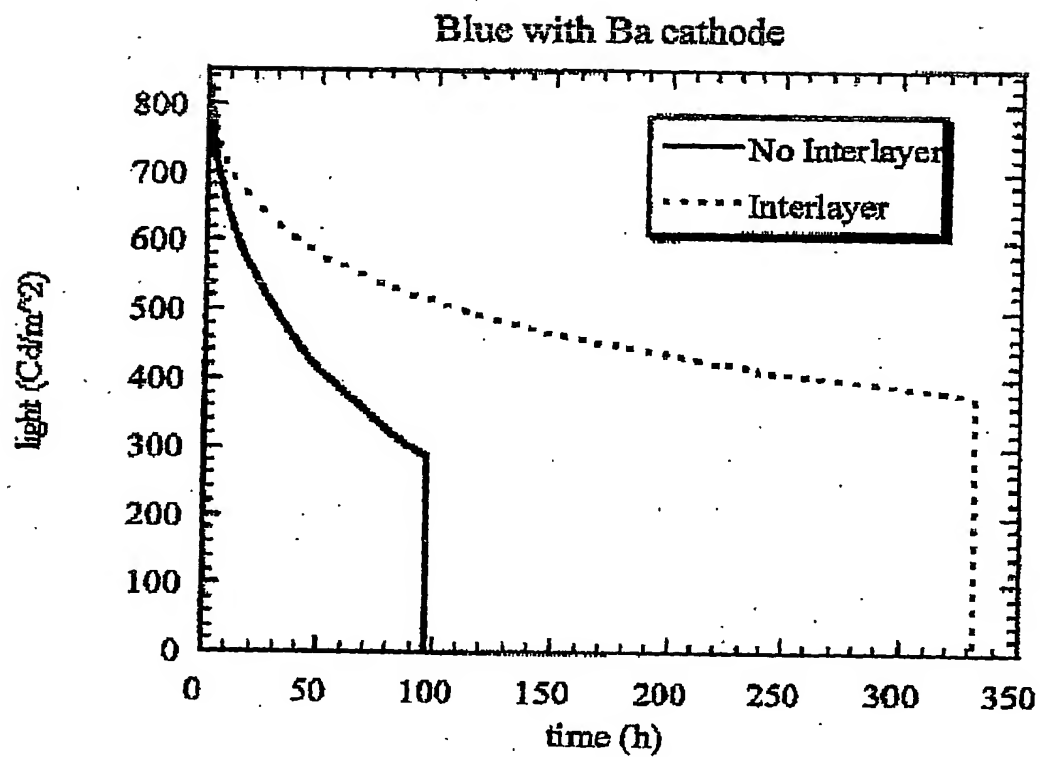


Figure 3


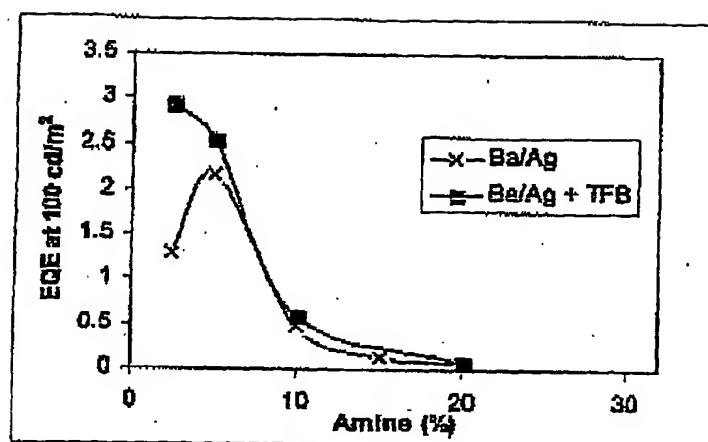


Figure 4

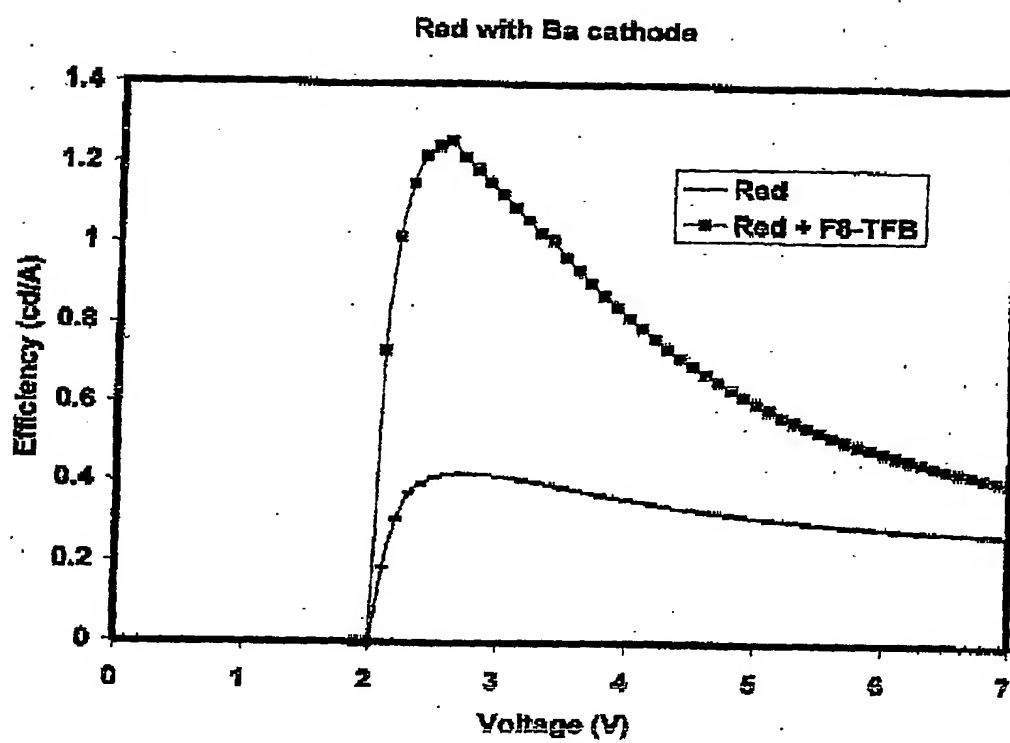

DUPLICATE

## Electroluminescent Device

### Field of the Invention

The invention relates to organic optical devices, in particular organic electroluminescent and photovoltaic devices.

### Background of the Invention

One class of opto-electrical devices is that using an organic material for light emission (an organic light emitting device or "OLED") or as the active component of a photocell or photodetector (a "photovoltaic" device). The basic structure of these devices is a semiconducting organic layer sandwiched between a cathode for injecting or accepting negative charge carriers (electrons) and an anode for injecting or accepting positive charge carriers (holes) into the organic layer.

In an organic electroluminescent device, electrons and holes are injected into the semiconducting organic layer where they combine in to generate excitons that undergo radiative decay. In WO 90/13148 the organic light-emissive material is a polymer, namely poly (p-phenylenevinylene) ("PPV"). Other light emitting polymers known in the art include polyfluorenes and polyphenylenes. In US 4,539,507 the organic light-emissive material is of the class known as small molecule materials, such as (8-hydroxyquinoline) aluminium ("Alq3"). WO 99/21935 discloses the class of materials known as dendrimers. In a practical device one of the electrodes is transparent, to allow photons to escape the device.

A organic photovoltaic device has the same construction as an organic electroluminescent device, however charge is separated rather than combined as described in, for example, WO 96/18449.

One feature of OLED architecture that has attracted considerable research is the selection of the cathode. Factors to be taken into account in selecting a cathode include (a) the workfunction of the cathode relative to the lowest unoccupied molecular orbital (LUMO) of the emissive material and (b) the possibility of the cathode degrading the organic material or vice versa. It will therefore be apparent that selection of the appropriate cathode for a given material is not straightforward, and is yet further



complicated when the cathode is required to be compatible with all three of a red, green and blue electroluminescent material as per a full colour OLED. For example, Synthetic Metals 111-112 (2000), 125-128 discloses a full colour display wherein the cathode is LiF / Ca / Al. The present inventors have found that this cathode is particularly efficacious with respect to the blue emissive material but which shows poor performance with respect to green and, especially, red emitters. For this cathode, the present inventors have found a particular problem of degradation in green and red efficiency when pixels of these colours are not driven which is believed to be due to migration of lithium into the electroluminescent material.

Some attention has been directed towards cathodes comprising barium. For example cathodes comprising elemental barium are disclosed in WO 98/57351, Appl. Phys. Lett. 2002, 81(4), 634 and WO 02/84759, and cathodes comprising barium fluoride are disclosed in Appl. Phys. Lett. 2001, 79(5), 2001 and in the applicant's co-pending application PCT GB02/03882. However, barium containing cathodes still have drawbacks. In particular, the workfunction of barium is relatively high which makes injection of electrons into the LUMO of the typical blue electroluminescent material energetically unfavourable. Thus, barium is a relatively inefficient electron injector for blue electroluminescent materials at least.

It is therefore an object of the invention to provide an organic optical device wherein the cathode comprises a relatively high workfunction metal, but has improved performance, in particular improved lifetime (i.e. the time taken for the brightness of the device to decay to half its original brightness at a fixed current) and improved efficiency, as compared to prior art devices with cathodes comprising barium.

#### Summary of the invention

The present inventors have surprisingly found that the combination of a cathode comprising a relatively high workfunction metal such as barium and a hole transporting / electron blocking layer results in an improvement in both lifetime and efficiency for OLEDs across the range of colours.

Barium has a workfunction (wf) of 2.7 eV; strontium has a wf of 2.59 eV; and calcium has a wf of 2.87 eV (source: J. Appl. Phys. 48(11) 1987, 4730.)

Accordingly, in a first aspect the invention provides an optical device comprising

- an anode
- a cathode comprising barium, strontium or calcium; and
- a layer of organic semiconducting material between the anode and the cathode







wherein a layer of hole transporting and electron blocking material is located between the anode and the layer of organic semiconducting material.

Preferably, the cathode comprises barium, more preferably elemental barium.

Preferably, the optical device is an electroluminescent device, more preferably a full colour electroluminescent device wherein the layer of organic semiconducting material comprises red, green and blue electroluminescent materials.

Preferably, the layer of hole transporting and electron blocking material comprises a triarylamine. More preferably, the triarylamine is provided as repeat units of a polymer. In this case, the polymer is preferably a copolymer having one or more arylene co-repeat units. Preferred co-repeat units are selected from optionally substituted fluorene, spirofluorene, indenofluorene and phenylene, more preferably 9,9-disubstituted fluorene-2,7-diyl.

Where the triarylamine is a repeat unit of a polymer, it is preferably selected from repeat units of formulae 1-6:

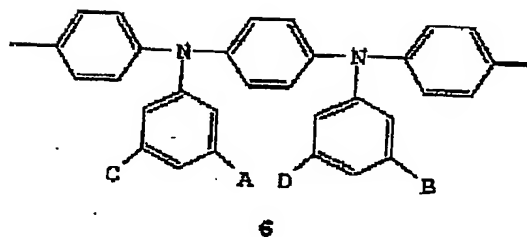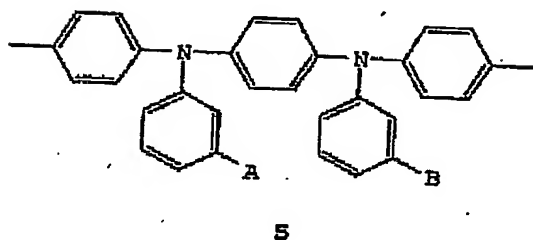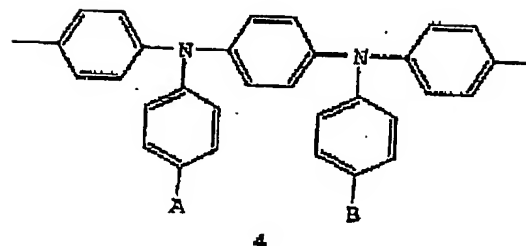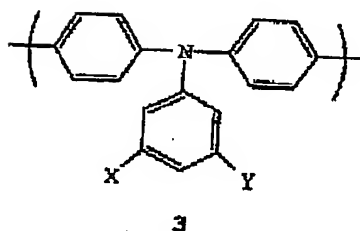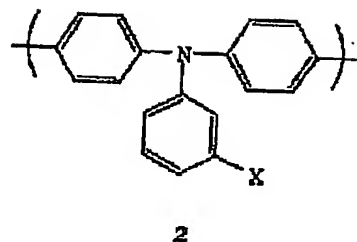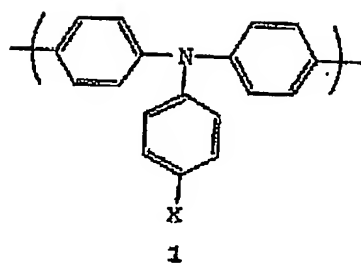


wherein X, Y, A, B, C and D are independently selected from H or a substituent group. More preferably, one or more of X, Y, A, B, C and D is independently selected from the group consisting of optionally substituted, branched or linear alkyl, aryl, perfluoroalkyl, thioalkyl, cyano, alkoxy, heteroaryl, alkylaryl and arylalkyl groups. Most preferably, X, Y, A and B are C<sub>1-10</sub> alkyl. The repeat unit of formula 1 is most preferred.

Preferably, the layer of organic semiconducting material is a semiconducting polymer, more preferably a semiconducting copolymer.

Where the organic semiconducting material is a copolymer, preferred repeat units are selected from optionally substituted fluorene, spirofluorene, indenofluorene and phenylene, more preferably 9,9-disubstituted fluorene-2,7-diyl. Preferred 9-substituents are optionally substituted alkyl and aryl.

Triarylamines of formulae 1-6 are preferred repeat units for the semiconducting copolymer, most preferably in combination with the repeat units identified in the preceding paragraph.

One particularly preferred triarylamine repeat unit is an optionally substituted repeat unit of formula (I):

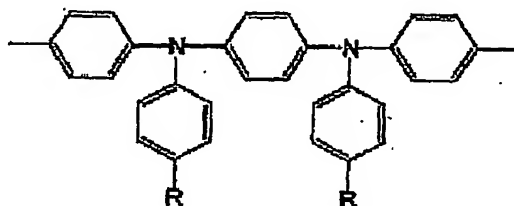

(I)

wherein each R is independently selected from the group consisting of H or optionally substituted, branched or linear alkyl, aryl, perfluoroalkyl, thioalkyl, cyano, alkoxy, heteroaryl, alkylaryl and arylalkyl groups. Preferably, each R is a C<sub>1-10</sub> alkyl. Yet more preferably, each R is butyl, most preferably n-butyl.

Where the organic semiconducting material is a copolymer comprising triarylamine repeat units, the present inventors have surprisingly found that device performance is improved at lower molar ratios of the triarylamine repeat unit. Therefore, the molar ratio of triarylamine in such copolymers is preferably less than or equal to 50 %, more preferably less than or equal to 30 % and most preferably 1-10 %.

Preferably, a layer of hole injecting material is located between the anode and the layer of hole transporting and electron blocking material. The hole injecting material is preferably a polymer, more preferably poly(ethylene dioxythiophene).

Preferably, the cathode comprises a first layer in contact with the organic semiconducting layer comprising elemental barium, strontium or calcium and a second layer comprising an inert metal. Preferably, the inert metal is silver, aluminium or gold.

In a second aspect, the invention provides a method of forming an optical device comprising

- providing a substrate comprising an anode;
- depositing a layer of hole transporting and electron blocking material onto the anode;
- depositing a layer of organic semiconducting material over the layer of hole transporting and electron blocking material; and
- depositing a cathode comprising barium, strontium or calcium over the layer of organic semiconducting material

Preferably, a layer of hole injecting material is deposited between the anode and the layer of hole transporting and electron blocking material.

The present inventors have surprisingly found that solution deposition of the soluble hole transporting and electron blocking material produces a layer that is at least partially resistant to dissolution, in particular resistant to dissolution when the organic semiconducting material is deposited from a solution using a solvent that the hole transporting and electron blocking material is otherwise soluble in. This resistance to dissolution enables the organic semiconducting material to be deposited from solution without completely intermixing with the hole transporting and electron blocking layer. The present inventors have found that this resistance to dissolution is obtained (a) regardless of whether a PEDT/PSS layer is used or not and (b) when the hole transporting and electron blocking material is deposited in air or in a nitrogen only environment.

Therefore, the layer of hole transporting and electron blocking material and the layer of organic semiconducting material are both preferably deposited from solution. In this case, both the layer of hole transporting and electron blocking material and the layer of organic semiconducting material are preferably polymers.

The resistance of the hole transporting and electron blocking material to dissolution may be increased by heat treatment of the layer following deposition. Therefore, when the layer of hole transporting and electron blocking material and the layer of organic semiconducting material are both deposited from solution, it is preferred that the hole transporting and electron blocking layer is subjected to heat treatment prior to deposition of the organic semiconducting material. Preferably, the heat treatment is below the

glass transition temperature ( $T_g$ ) of the hole transporting and electron blocking material. Preferably, the organic semiconducting material is substantially free of cross-linkable vinyl or ethynyl groups.

By "red electroluminescent material" is meant an organic material that by electroluminescence emits radiation having a wavelength in the range of 600-750 nm, preferably 600-700 nm, more preferably 610-650 nm and most preferably having an emission peak around 650-660 nm.

By "green electroluminescent material" is meant an organic material that by electroluminescence emits radiation having a wavelength in the range of 510-580 nm, preferably 510-570 nm.

By "blue electroluminescent material" is meant an organic material that by electroluminescence emits radiation having a wavelength in the range of 400-500 nm, more preferably 430-500 nm.

#### **Brief Description of the Drawings**

The present invention will now be described in further detail, by way of example only, with reference to the accompanying drawings in which:

FIGURE 1 shows an electroluminescent device according to the invention.

FIGURE 2 shows a plot of luminance vs. time for a blue electroluminescent device

FIGURE 3 shows a plot of external quantum efficiency vs. amine content for a series of blue electroluminescent devices

FIGURE 4 shows a plot of efficiency vs. bias for a red electroluminescent device

#### **Detailed Description of the Invention**

With reference to figure 1, a PLED or photovoltaic device according to the invention may comprise a substrate 1, an anode 2 of indium tin oxide, a layer 3 of organic hole injection material, a layer 4 of hole transporting and electron blocking material, a layer 5 of organic semiconducting material and a cathode 6.

Optical devices tend to be sensitive to moisture and oxygen. Accordingly, the substrate preferably has good barrier properties for prevention of ingress of moisture and oxygen into the device. The substrate is commonly glass, however alternative substrates may be used, in particular where flexibility of the device is desirable. For example, the substrate may comprise a plastic as in US 6268695 which discloses a substrate of alternating plastic and barrier layers or a laminate of thin glass and plastic as disclosed in EP 0948850.

Although not essential, the presence of layer 3 of organic hole injection material is desirable as it assists hole injection from the anode into the layer or layers of semiconducting polymer. Examples of organic hole injection materials include poly(ethylene dioxythiophene) (PEDT / PSS) as disclosed in EP 0901176 and EP 0947123, or polyaniline as disclosed in US 5723873 and US 5798170.

Cathode 6 comprises a layer containing barium. This layer may consist solely of barium or it may comprise barium and another material, for example an alloy comprising barium. As an alternative to elemental barium, cathode 6 may comprise a layer containing a dielectric barium salt, in particular barium fluoride as disclosed in Appl. Phys. Lett. 2001, 79(5), 2001.

Cathode 6 may also comprise a capping layer of a relatively inert material over the layer containing barium. Suitable inert materials include silver, gold and aluminium.

The device is preferably encapsulated with an encapsulant (not shown) to prevent ingress of moisture and oxygen. Suitable encapsulants include a sheet of glass, films having suitable barrier properties such as alternating stacks of polymer and dielectric as disclosed in, for example, WO 01/81640 or an airtight container as disclosed in, for example, WO 01/19142.

In a practical device, at least one of the electrodes is semi-transparent in order that light may be absorbed (in the case of a photoresponsive device) or emitted (in the case of a PLED). Where the anode is transparent, it typically comprises indium tin oxide. Examples of transparent cathodes are disclosed in, for example, GB 2348316. An example of a transparent, barium containing cathode comprises a bilayer of barium and gold.

The hole transporting and electron blocking layer may be a triarylamine-containing small molecule, dendrimer, homopolymer or copolymer. For example, fluorene-triarylamine copolymers are disclosed in WO 99/54385. Another material suitable for use as hole transporting and electron blocking layer 4 is poly(vinyl carbazole) as disclosed in, for example, IEEE Transactions on Electron Devices, 1997, 44(8), 1263-1268.

The organic semiconducting material used to form layer 5 may be a fluorescent small molecule, dendrimer or polymer. The layer 5 may alternatively comprise a phosphorescent material doped into a host material.

Suitable polymers for use as layer 5 include poly(p-phenylene vinylenes), polyphenylenes and polyfluorenes as disclosed in Adv. Mater. 2000 12(23) 1737-1750 and references therein. A single polymer or a plurality of polymers may be deposited from solution to form layer 5. Where a plurality of polymers are deposited, they may comprise a blend of at least two of a hole transporting polymer, an electron transporting polymer and, where the device is a PLED, an emissive polymer as disclosed in WO 99/48160. Alternatively, layer 5 may be formed from a single polymer that comprises regions selected from two or more of hole transporting regions, electron transporting regions and emissive regions as disclosed in, for example, WO 00/55927 and US 6353083. Each of the functions of hole transport, electron transport and emission may be provided by separate polymers or separate regions of a single polymer. Alternatively, more than one function may be performed by a single region or polymer. In particular, a single polymer or region may be capable of both charge transport and emission. Each region may comprise a single repeat unit, e.g. a triarylamine repeat unit may be a hole transporting region. Alternatively, each region may be a chain of repeat units, such as a chain of polyfluorene units as an electron transporting region. The different regions within such a polymer may be provided along the polymer backbone, as per US 6353083, or as groups pendant from the polymer backbone as per WO 01/62869. In view of the hole transporting and electron blocking properties of layer 4, such properties may optionally be excluded from the polymer or polymers comprising layer 5.

Layers 4 and 5 may be formed by any process for forming multiple layers in organic optical devices. It is desirable to minimise intermixing of layers 4 and 5; in the case of small molecules, this is straightforward because each layer is typically deposited by evaporation under vacuum. In contrast, dendrimers and polymers are typically



deposited from solution and so it is desirable to employ a technique to prevent intermixing when layer 5 is deposited from solution onto a solution deposited layer 4. One technique for preventing intermixing of multiple solution deposited layers is the heat treatment step described in the second aspect of the invention, however other techniques are known. For example IEEE Transactions on Electron Devices, 1997, 44(5), 1263-1288, describes solution deposition of two materials that require different solvents, i.e. the solvent used to deposit the second layer of a multilayer does not dissolve the underlying layer. Another technique disclosed in, for example, WO 94/03030 is to use an insoluble PPV as the first layer by depositing a soluble "precursor" polymer and then heating it to form the insoluble PPV onto which a further layer may be deposited from solution. Yet another technique disclosed in, for example, US 6107452, is to deposit from solution a layer of material comprising cross-linkable groups and then treating the layer under cross-linking conditions, e.g. heat or UV treatment, to form a layer of insoluble material onto which a further layer may be deposited from solution.

The optical device prepared according to the method of the invention is preferably a PLED when the first and second electrodes inject charge carriers. In this case, layer 5 is a light emitting layer.


The optical device is preferably a photovoltaic device or photodetector when the first and second electrodes accept charge carriers. In this case, layer 5 comprises a material capable of electron transport.

Electroluminescent devices may be monochrome, multicolour or full colour. Processes for production of monochrome displays include spin coating and dip-coating. Processes for production of full colour displays include inkjet printing as described in, for example, EP 0880303 and laser induced thermal imaging as disclosed in, for example, EP 1003354.

## Examples

### General procedure

The invention is exemplified here using the polymer "F8-TFB", illustrated below and disclosed in WO 99/54385, as the hole transporting and electron blocking material.

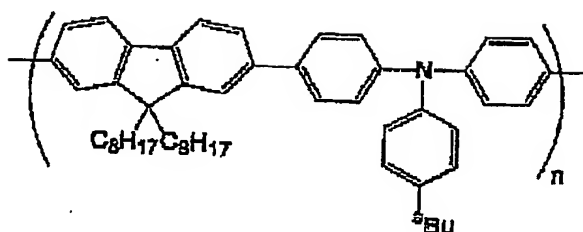**"F8-TFB"**


The general procedure follows the steps outlined below:

- 1) Depositing PEDT / PSS, available from Bayer ® as Baytron P ® onto indium tin oxide supported on a glass substrate (available from Applied Films, Colorado, USA) by spin coating.
- 2) Depositing F8-TFB is by spin coating from xylene solution having a concentration of 2 % w / v.
- 3) Optionally heating the device at 180°C for 1 hour.
- 4) Optionally spin-rinsing the substrate in xylene to remove any remaining soluble F8-TFB
- 5) Depositing a layer of semiconducting polymer by spin-coating from xylene solution to a thickness of around 750Å.
- 6) Depositing by evaporation over the semiconducting polymer a cathode consisting of a first layer of barium metal in contact with the semiconducting polymer and a capping layer of aluminium over the layer of barium metal.
- 7) Encapsulation of the device using an airtight metal container as described in EP 0776147.

#### **Example 1 – blue electroluminescent device**

The general procedure above was followed, including optional step 3 but excluding optional step 4. The organic semiconducting polymer used was a blue electroluminescent copolymer of the following repeat units: 65 mol% 9,9-di-n-octylfluorene-2,7-diyl, 30 mol% 9,9-diphenylfluorene-2,7-diyl, and 5 mol% of the repeat

unit "PFB" (represented below). The polymer was prepared by Suzuki polymerisation according to the method described in WO 00/53656.

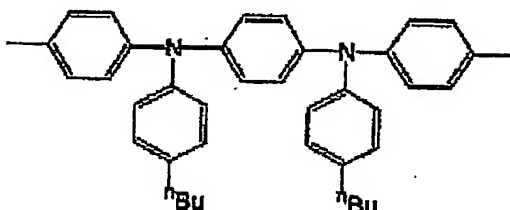

**"FFB"**

For the purpose of comparison, an identical device was prepared except that the layer of F8-TFB was not deposited (i.e. exclusion of steps 2-4).

Despite the absence of cross-linking groups, the layer of F8-TFB is resistant to dissolution in xylene under the conditions typically employed for polymer deposition. Although dissolution of the F8-TFB layer in a solvent may be possible under forcing conditions, it will be appreciated that this layer is sufficiently resistant to dissolution to enable the formation of a plurality of electroactive organic layers. Without wishing to be bound by any theory, a possible mechanism for loss of solubility is an adhesion to the surface that the first semiconducting polymer is deposited onto.

As can be seen from Figure 2, the inclusion of an "interlayer" of F8-TFB results in a very significant increase in lifetime.

Without wishing to be bound by any theory, the improvement in lifetime may be due to the F8-TFB layer preventing electrons from flowing into the PEDT:PSS and / or encode (i.e. hole injection) layers.

### Example 2 – blue electroluminescent devices with variation of amine content

A series of devices was prepared by following the procedure of example 1 except that the molar ratio of PFB repeat units within the polymer was varied from 2.5 % up to 20 % (the ratio of diphenylfluorene was kept constant at 30 %; the change in PFB ratio was accommodated by increasing or decreasing the ratio of diphenylfluorene).


For the purpose of comparison, an identical series of devices was prepared except that the layer of F8-TFB was not deposited (i.e. exclusion of steps 2-4).

As can be seen from Figure 3, the external quantum efficiency (EQE) of the device according to the invention is at least similar to, and at low PFB content significantly greater than, comparative devices wherein the layer of F8-TFB is absent.

Without wishing to be bound by any theory, it is believed that low amine content leads to superior device performance because barium is believed to be a relatively poor electron injector. Therefore, charge is balanced when the quantity of PFB repeat units, which are capable of transporting holes, is reduced. Similarly, selection of a good electron injector (for example dielectric materials, in particular fluorides such as lithium fluoride) may show optimal performance at higher molar ratios of amine.

#### Example 3 – red electroluminescent device

The procedure of Example 1 was followed, except that the organic semiconducting material used was a red electroluminescent polymer of the following repeat units: 50 mol% 9,9-di-n-octylfluorene-2,7-diyl, 17 mol% "TFB" repeat units (illustrated below), 30 mol% 1,3,2-benzothiadiazole-4,7-diyl, and 3 mol% 4,7-bis(2-thiophen-5-yl)-1,3,2-benzothiadiazole. Materials of this type are disclosed in WO 00/46321 and WO 00/55927, the contents of which are incorporated herein by reference.



"TFB"

Figure 4 shows that efficiency of the device comprising a layer of F8-TFB is higher than the comparative device wherein this layer is absent. The improvement is most significant at low voltage.

Furthermore, lifetime of the red electroluminescent device was at least doubled as compared to the comparative device.

#### **Example 4 – green electroluminescent device**

Devices were prepared in accordance with the process of Example 1, except that the organic semiconducting material used was a green electroluminescent polymer as disclosed in, for example, WO 00/55927 and WO 00/46321.

As for the red and blue electroluminescent devices, substantial improvements were observed for both lifetime and efficiency as compared to a device not comprising the layer of F8-TFB.

It will be apparent that devices according to the invention show improvement for OLEDs across a wide range of colours and as such are particularly suitable full colour displays, i.e. those comprising red, green and blue electroluminescent materials.

Although the present invention has been described in terms of specific exemplary embodiments, it will be appreciated that various modifications, alterations and / or combinations of features disclosed herein will be apparent to those skilled in the art without departing from the spirit and scope of the invention as set forth in the following claims.







**Claims****1) An optical device comprising**

- an anode
- a cathode comprising barium, strontium or calcium; and
- a layer of organic semiconducting material between the anode and the cathode

wherein a layer of hole transporting and electron blocking material is located between the anode and the layer of organic semiconducting material.


- 2) An optical device according to claim 1 that is an electroluminescent device.**
- 3) An optical device according to claim 2 that is a full colour device wherein the layer of organic semiconducting material comprises red, green and blue electroluminescent materials.**
- 4) An optical device according to any preceding claim wherein the cathode comprises barium.**
- 5) An optical device according to any preceding claim wherein the layer of hole transporting and electron blocking material comprises a triarylamine.**
- 6) An optical device according to claim 5 wherein the triarylamine is provided as repeat units of a polymer.**
- 7) An optical device according to claim 6 wherein the polymer is a copolymer comprising one or more arylene co-repeat units.**

- 8) An optical device according to claim 7 wherein one or more of the arylene co-repeat units are selected from optionally substituted fluorene, spirofluorene, indenofluorene and phenylene, preferably 9,9-disubstituted fluorene-2,7-diyl.
- 9) An optical device according to any one of claims 6-8 wherein the triarylamine repeat unit is selected from repeat units of formulae 1-6:

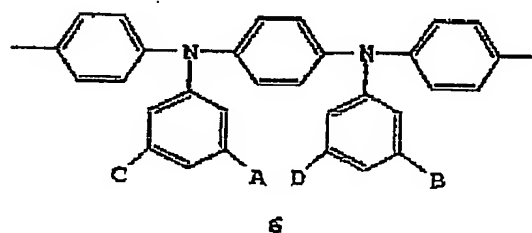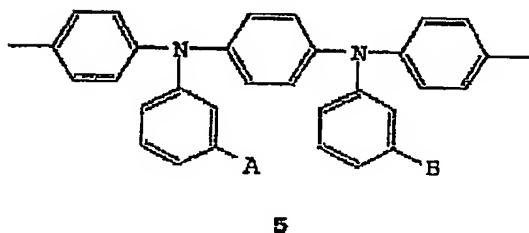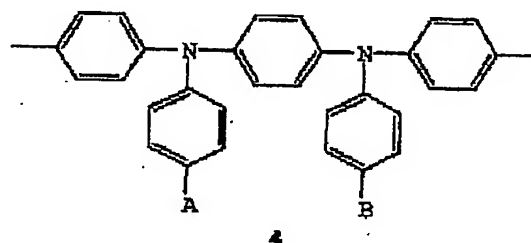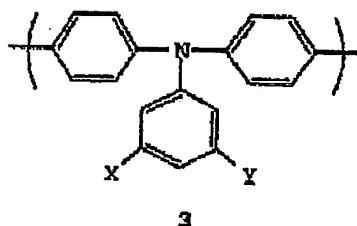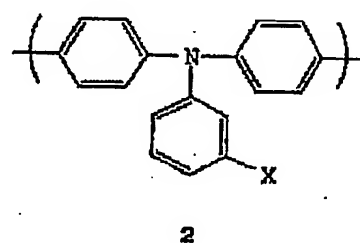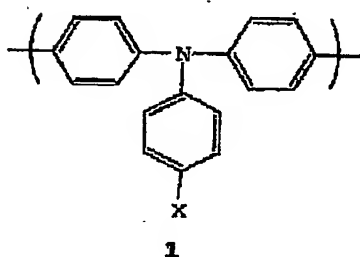

wherein X, Y, A, B, C and D are independently selected from H or a substituent group. More preferably, one or more of X, Y, A, B, C and D is independently selected from the group consisting of optionally substituted, branched or linear alkyl, aryl, perfluoroalkyl, thioalkyl, cyano, alkoxy, heteroaryl, alkylaryl and arylalkyl groups.

- 10) An optical device according to any preceding claim wherein the layer of organic semiconducting material is a semiconducting polymer, preferably a semiconducting copolymer.
- 11) An optical device comprising a semiconducting copolymer according to claim 10 wherein the semiconducting copolymer comprises repeat units selected from optionally substituted fluorene, spirofluorene, indenofluorene and phenylene, preferably 9,9-disubstituted fluorene-2,7-diyl.
- 12) An optical device comprising a semiconducting copolymer according to claim 10 or 11 wherein said semiconducting copolymer comprises a repeat unit selected from triarylamine repeat units of formulae 1-6 defined in claim 9.
- 13) An optical device according to claim 12 wherein said co-repeat unit is a repeat unit of formula (I):

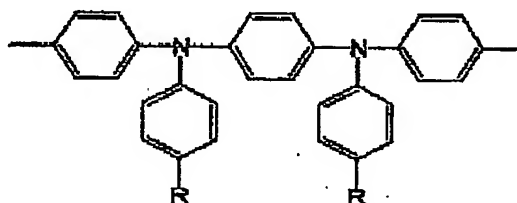

(I)

wherein each R is independently selected from the group consisting of H or optionally substituted, branched or linear alkyl, aryl, perfluoroalkyl, thioalkyl, cyano, alkoxy, heteroaryl, alkylaryl and arylalkyl group, more preferably C<sub>1-10</sub> alkyl, yet more preferably butyl.

- 14) An optical device according to any one of claims 12-14 wherein the molar ratio of the triarylamine repeat units is less than or equal to 50 %, more preferably less than or equal to 30 %, most preferably 1-10 %.
- 15) An optical device according to any preceding claim wherein a layer of hole injecting material is located between the anode and the layer of hole transporting and electron blocking material.



- 16) An optical device according to claim 15 wherein the layer of hole injecting material is poly(ethylene dioxythiophene).
- 17) An optical device according to any preceding claim wherein the cathode comprises elemental barium.
- 18) A method of forming an optical device comprising
- providing a substrate comprising an anode;
  - depositing a layer of hole transporting and electron blocking material onto the anode;
  - depositing a layer of organic semiconducting material over the layer of hole transporting and electron blocking material; and
  - depositing a cathode comprising barium, strontium or calcium over the layer of organic semiconducting material.
- 19) A method according to claim 18 wherein a layer of hole injecting material is deposited between the anode and the layer of hole transporting and electron blocking material.
- 20) A method according to claim 18 or 19 wherein the layer of hole transporting and electron blocking material and the layer of organic semiconducting material are both deposited from solution.
- 21) A method according to claim 20 wherein both the layer of hole transporting and electron blocking material and the layer of organic semiconducting material are polymers.
- 22) A method according to claim 20 or 21 wherein the hole transporting and electron blocking layer is subjected to heat treatment prior to deposition of the organic semiconducting material.
- 23) A method according to claim 22 wherein the heat treatment is below the glass transition temperature of the hole transporting and electron blocking material.

- 24) A method according to any one of claims 20-23 wherein the organic semiconducting material is substantially free of cross-linkable vinyl or ethynyl groups

Figure 1

This Page is inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record

## BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☒ SKEWED/SLANTED IMAGES
- ☐ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images  
problems checked, please do not report the  
problems to the IFW Image Problem Mailbox**